

Stacking a Pallet of Concrete Roof Tiles


All Rows:

Concrete roof tiles are stacked singly with a row of 3 across the front of the pallet, one on either side of the centre and another row of 3 on the back of the pallet. See the diagram below. Repeat for 30 rows high on a pallet.

1	2	3
1	Gap	1
1	2	3

Notes:

- Use only full complete roof tiles.
- All roof tiles must be packed tight and even to ensure the safety and stability of each pack for moving and stacking.
- The pallet must be placed on flat even ground. The pallet must be placed where the forks of a crane/forklift can access the bottom openings. If there is more than one pallet - there must a good walking space (approximately 70cm) around the edge of the pallet so that it may be wrapped when completed.
- Do not place pallets under power lines, trees, roof or building. A crane must be able to lift upwards to move the pallet. Place pallets next to road as the truck will not drive on driveways in case of damage to the driveway.

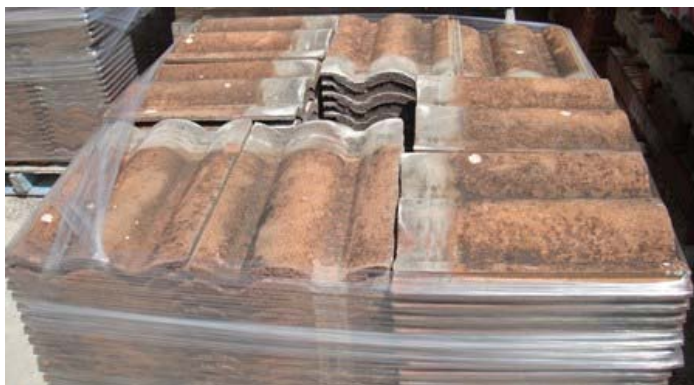

Top View



Side View